



## Public Address 4CH Mixer Amplifier

### Features:


#### Controls

- Front: 4 Mic/Line input level (CH1-4) controls with 3-band EQ and output selector switches.  
Line input level (CH5-8) controls with selector switches.  
4 Output level controls with tone control and monitor switches. Monitor volume control.
- Rear: 8 Gain control for each input.  
Phantom power switches for CH1-4.  
Alarm message input with contact closure and level adjustment.  
AC input voltage selector (115V or 230V) and system ground switch (chassis ground or lift).  
Monitor speaker connector (1W at 8ohms).

#### Connectors

- 2 XLR Electronically Balanced jack and 1/4" phone jack for CH1-4 input.
- 2 1/4" phone jack and RCA jack for CH5-8 input.
- 2P Euro Block for System mute with contact closure.
- RJ45 jack for Wall Panel (WP-1).
- RJ45 jack for Zone Selectable Microphone Station (RM4).
- 3P Euro Block for Line inputs and outputs.
- 2P Euro Block for Speaker output.

Indicators: Power. SIG, CLIP for each input channel and SIG, -10dB, CLIP, PROT for each output channel.

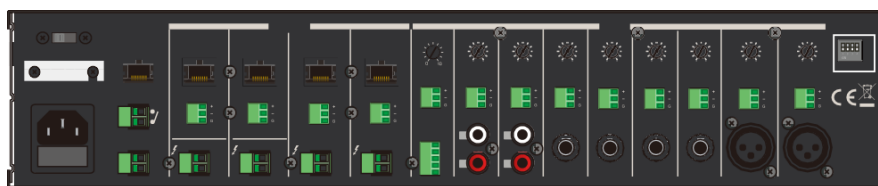

Model		JMA-8412	JMA-8424
Rated Output Power		120W X 4	240W X 4
Output / Impedance		65Hz - 18kHz	
Input sensitivity / Impedance		Mic Input - 50dB ~ - 6d B / 600 Balanced Line Input -30dB ~ +14dB / 20K Balanced Remote Input 0dB / 20K Balanced	
Output level / Impedance		0dB / 600 Ω Balanced	
Frequency Response		(-1dB) 20Hz - 20kHz	
T.H.D		< 0.1%	
Crosstalk		> 70 dB	
Equalization	Input	High : 12 kHz 12 dB / Mid : 2.5 kHz 12 dB / Low : 80 Hz 12 dB	
	Output	High : 10 kHz 12 dB / Low : 100 Hz 12 dB	
Hum & Noise		> 90 dB	
Power Source		AC 115/230 Volt, 50~60Hz	
Weight (Net)		9 kg	
Dimensions		(W x H x D) 483 x 88 x 320mm	



**Legende Integrated Industries**  
25 Mohamed El Nady St, 8th District, Nasr City

**legende-ind.com**  
**info@legenede.com**

