



Public Address 8CH Power Amplifier

Features:

Amplifiers

- User selectable constant voltage (100V/70V) and 4ohms outputs with power sharing mode.

Controls

- Front: Power On/Off switch.
- Rear: Volume Control, output selection (100V/70V/4ohm) switch for each channel. Ground lift switch.

Connectors


- Input: Euro block for Electronically Balanced Input for each channel.
- Output: Euro block for each channel.
- Dante: Custom option.

Indicators: Sig, Clip, Protect & Power On.

Protections: Over Voltage, Under Voltage, over current with Fuse and over temperature Protection.

Cooling: Variable speed fan forced cooling.

Power sharing: Up to 480W output at one channel

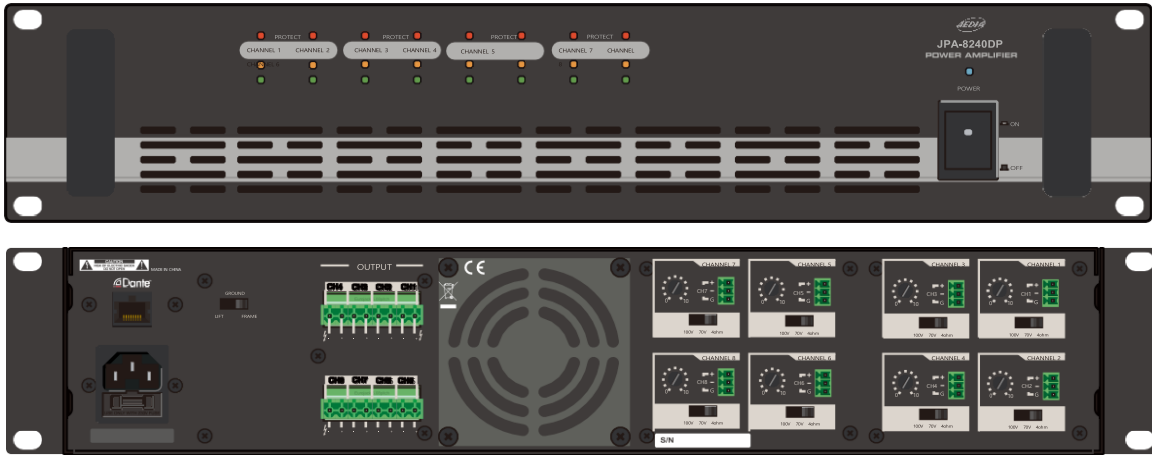

| Model | JPA-4120DP | JPA-4240DP |
|-------------------------------|------------------------|------------|
| Rated Power (1kHz, THD 1%) | 120W X 8 | 240W X 8 |
| Output Impedance | 100V or 70V or 4 Ω | |
| Input sensitivity / Impedance | 0dB / 20 kohm Balanced | |
| Frequency Response | 50Hz - 15kHz | |
| T.H.D(1kHz, 1/3 Rated Power) | 0.1% | |
| Signal to Noise Ratio | 90dB | |
| Power Source | AC 100~240 V, 50/60Hz | |
| Weight (Net) | 8.5 kg | 8.7 kg |
| Dimensions (W x H x D) | 483 x88 x 360mm | |



Legende Integrated Industries
25 Mohamed El Nady St, 8th District, Nasr City

legende-ind.com
info@legenede.com